

AXIAL BATHROOM FANS

E GLASS Series. Energy-efficient. Low-noise




AMBIENT LIGHT



VERY SILENT



HIGHT ENERGY EFFICIENCY



LED 2x2W ADJUSTABLE INTENSITY



LIGHTED DISPLAY



FRONT GLASS



PIR: INFRA RED SENSOR ACTIVATED BY PRESENCE

- **Perimeter extraction** system.
- **Glass cover.**
- Available models with ambient light and infra-red sensor activated by presence (ø100).
- **High-performance plastic housing and impeller.**
- **Temperature and humidity display** (available on humidistat model).
- Backdraught shutter (accessory).
- Fitted with 220-240 50/60Hz motors (110-127V 60Hz on request), IP-44 protection and insulation class B as standard.
- **Minimum sound level of 17dB (according to the model)**
- 2-speed function (humidistat version only), to be selected prior to installation between continuous or NON continuous working.
 - 1st speed: slow speed for continuous extraction.
 - 2nd speed: activates when light is switched on, by activating the humidistat or the timer.



E-100 GLASS PIR - Infra red sensor, activated by presence

E-100 GLASS LIGHT

REMOVABLE GLASS FRONT



EASILY REMOVABLE

Easy and speedy removal of the cover using a single tool (included in the packaging) which is also used to adjust the timer (GT and GTH version) and the humidistat (GTH version).

EASY TO CLEAN


Extra-flat glass cover that is easy to clean just by running a damp cloth over it.

E-100 G
E-120 G
E-150 G
E-100 GT
E-120 GT
E-150 GT



CODE	MODEL	COLOR	EAN CODE	VERSION	Ø (mm)	Speed (r.p.m)	Input Power (W)	Maximum Airflow (m³/h)	Sound Pressure Level dB(A)	Units per box
HYGRO SERIES										
00900200	E-100 GTH	□	8422248049634	●●	100	1ª vel 1100 2ª vel 2600	4 8	36 115	17 31	6
00901200	E-120 GTH	□	8422248056823	●●	120	1ª vel 900 2ª vel 2400	6 11	140 210	19 33	6
00902200	E-150 GTH	□	8422248056854	●●	150	1ª vel 900 2ª vel 2400	10 19	225 350	23 35	6
00900600	E-100 GSTH	■	8422248056076	●●	100	1ª vel 1100 2ª vel 2600	4 8	36 115	17 31	6
00900602	E-100 GTH BK	■	8422248071895	●●	100	1ª vel 1100 2ª vel 2600	4 8	36 115	17 31	6
TIMER SERIES										
00900100	E-100 GT	□	8422248049627	●	100	2600	8	115	31	6
00901100	E-120 GT	□	8422248056816	●	120	2400	15	210	33	6
00902100	E-150 GT	□	8422248056847	●	150	2200	21	350	35	6
00900500	E-100 GST	■	8422248056069	●	100	2600	8	115	31	6
00900502	E-100 GT BK	■	8422248071888	●	100	2600	8	115	31	6
00900001	E-100 GLT	□	8422248056786	●	100	2600	8+4	115	31	6
STANDAR SERIES										
00900000	E-100 G	□	8422248049610	●	100	2600	8	115	31	6
00900400	E-100 GS	■	8422248056052	●	100	2600	8	115	31	6
00900402	E-100 G BK	■	8422248071871	●	100	2600	8	115	31	6
00901000	E-120 G	□	8422248056809	●	120	2400	15	210	33	6
00902000	E-150 G	□	8422248056830	●	150	2200	21	350	35	6
PIR SERIES										
00900300	E-100 SENSOR	□	8422248057622	●	100	2600	8	115	31	6

DIMENSIONS mm

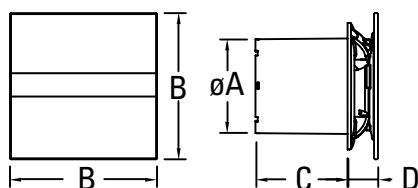

	Ø A	B	C	D
E GLASS -100	98	150	94	28,5
E GLASS -120	118	170	94	35
E GLASS -150	148	190	94	45
E GLASS -100 LIGHT/SENSOR	98	150	94	35

Versions



STANDARD
In combination with light, fans switches on.



TIMER
Electronic timer adjustable from 3 to 15 minutes.



HYGRO
Adjustable humidity detector from 40% to 95%, and adjustable electronic timer from 0 to 15 minutes.



PIR
Infra red sensor activated by presence and adjustable electronic timer from 40 seconds to 15 minutes.